Thank you
for your interest
in our offer!

MTB **Modules**
premium modular building systems

We would like to present you our offer to purchase of a modern house with a mezzanine - **MTB A** with a a total area of **20 sqm**.

The offer includes all elements prefabricated in our factory.

The assembly of house is carried out using the attached instruction, in which we have described each stage of the work step by step. Including the list of the materials needed at each of the stages.

The set includes all the materials to put the house in a closed state. This means that the offer includes the construction of the house with wall panels and all the necessary mounting elements (foams, screws, membranes), windows, doors, as well as a complete facade, roofing with gutters and downspouts. Visualizations in our gallery show what the finished house looks like after being assembled from the outside. We use for our houses only reputable companies such as:
Budmat, Swiss Krono, MTB Modules, Veka, Marcopol.

All elements have been cut and numbered already at the production stage.

Our time spent in the factory on the prefabrication process reduces the scope of work, that has to be done during conventional construction method by more than 70% and it also reduces costs by up 65%.

Production accuracy in factory conditions, supervision of quality control at every stage of production, qualified staff and short time of order realization distinguishes our offer from the. Wide competition.

Experienced builders can build this house even in **10 to 14 days.** Considering the already quick time of realization compared to traditional methods, people with basic construction knowledge can build it in **22-30 days.**

The control of the outside teams by the investor is also easier because every phase of construction is clearly described in the instruction.

Very important factors are: working time reduction, which is associated with constant increases remuneration of teams, lower power consumption, less noise during the work, waste reduction to a minimum and costs related to their disposal, no drying time for materials during construction (works are carried out dry), no need to insulate the building after erecting the walls (panels SIP have a 15 cm EPS core), reducing costs and the number of departures for missing items (everything delivered at once) as well as reducing the amount of unnecessary purchased materials, the possibility of assembly at any time of the year and completion of the entire investment, with furniture in less than a month from the start of the work.

The interior design presented in the photo gallery is only a proposal and inspiration for a future customer. Our offer consists of a DIY house in state closed, unfinished.

This allows for any interior arrangement, as well as successive finishing work. Works such as electrical, hydraulic and mechanical ventilation installations are responsibility of the client.

The mezzanine will work perfectly as a bedroom area. The height on the mezzanine is over 160 cm. The height on the ground floor is 230 cm. It is ideal height and does not overwhelm as in case 200 cm.

Two, big gable windows - triple-glazed with a dimensions of 230x237 cm let in a lot of sunlight. Windows are mounted on the window tape, not a foam like before. Made of high-quality material.

The security door, ergonomically wide – 90 cm. Ensures comfortable use. Made of high-quality material. They are heavy and quiet. Core- 55mm.

We do not use any „market materials" – in the cost of purchasing such door is more than 670 euros. We as a producer give this discount to our customer in the form of a good offer. The door also has vertical glazing and are mounted on the expanding tape, not a foam.

Two slanted balcony windows, open/tilt, with a dimensions of 233 H x 135 W with an opening wing and permanent site. Windows are triple-glazed, PCV, outside in anthracite color and inside in white. Window factor – 1,30 W/sqm.

The construction of the house based on branded wood, certified **C24 -Scandinavian wood**, which does not need impregnation (humidity around 18%).

SIP panels as elements of walls, external walls, partition walls, mezzanine floor and roof.

Windproof membranes for elevation, facade laths, modern roof type membrane "Pasta" (under the seam sheet). A set of screws (all Torx type) – certified.

The routing foams and branded foam gun, waterproofing to protect the bottom of the wall external, polystyrene grater – needed occasionally to correct the material allowance and during occurrence of non-standard modifications for example : installation of an additional window (this stage of work only on your own range). "Taker" type staples – membrane fastening. Mineral wool strip needed to seal the ridge. Fundamental foil 30 cm wide for foundation.

Modern seam plate roofing made by brand Budmat. It is a leading manufacturer of roofing plates and more. Color of the roofing RAL 7016 – anthracite MATT. The assembly of the roofing with the use of “farmer” fasteners is carried out in invisible places (under the sheet overlap).

Plate model - Iron Click
The latest system on the market, that is easy to install.

The facade plate is the same model described above - without exception. All elements are prefabricated to the size.

Flaps and other flashings are also in the same color RAL 7016 – anthracite matt (as above).

Each element from wall panels to screws, foam and tiny staples have own unique code, which is assigned to each assembly stage.

We transport to anywhere in the world (anywhere where it is possible). The cost of transport is calculated individually.

We attach a warranty card to the offer.

At this moment, the order fulfillment time is **40 days long** from signing the contract. We start realization by an advance payment - 40% of the order value. The payment of the rest (60%) takes place within three days before the departure from our factory or self-pickup. You will need three people to unload the elements. The driver only help with unloading.

The heaviest elements of the set are maximum 70 kg.

Insulation layer:

15 cm –EPS 80
Parameter U 0,23

It is possible to insulate the external walls with double layer wool 3,5 cm.
By using external thermal insulation (in the grate under the facade), we obtain the wall parameter of U 0,18, however on the roof U 0,15.

We recommended a foundation slab or SIP floor as a foundation.

Thank you for your interest and time.
Find out where the nearest Showroom is
in your area - https://mtbmodules.com/distributors/

Elevation - front

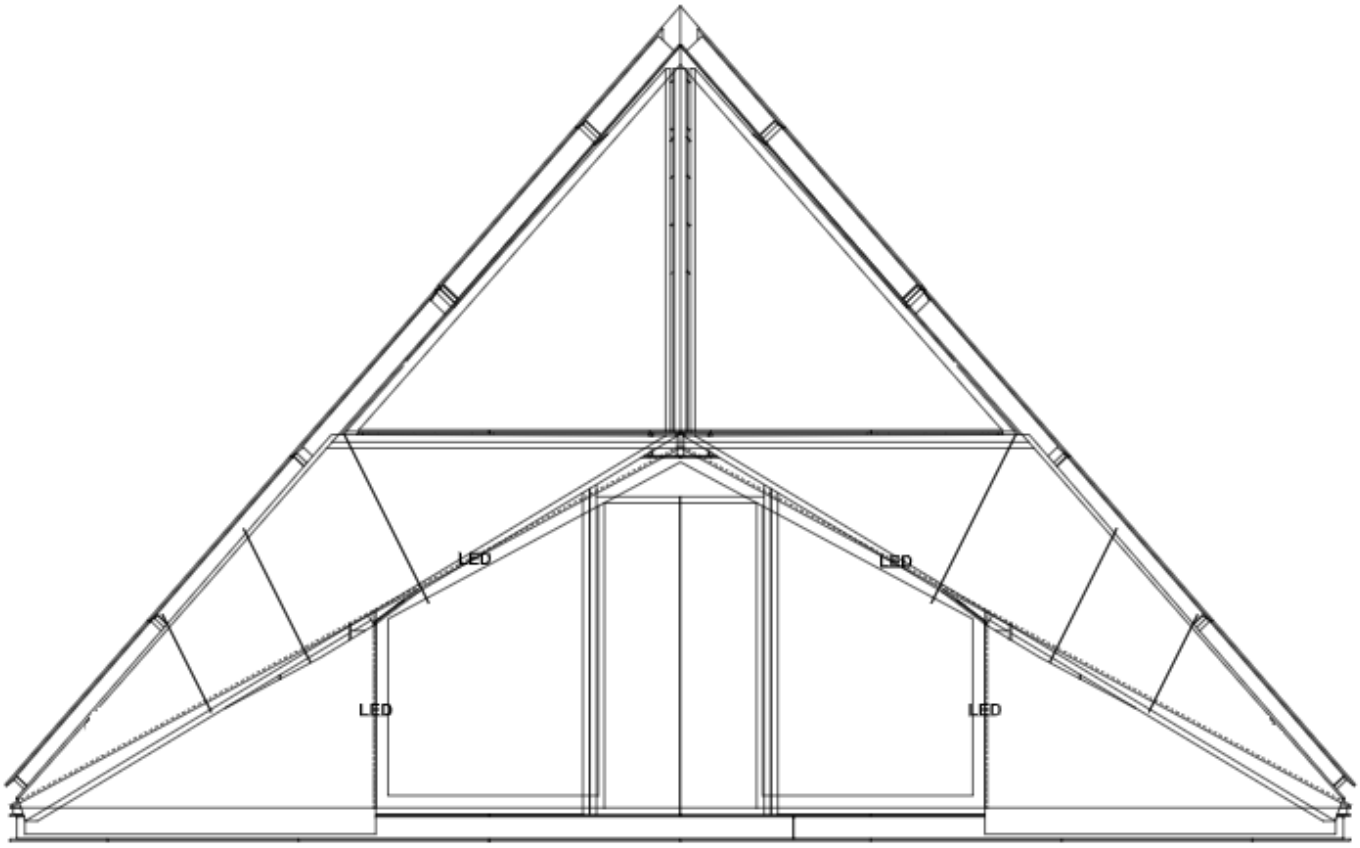

Elevation – side view

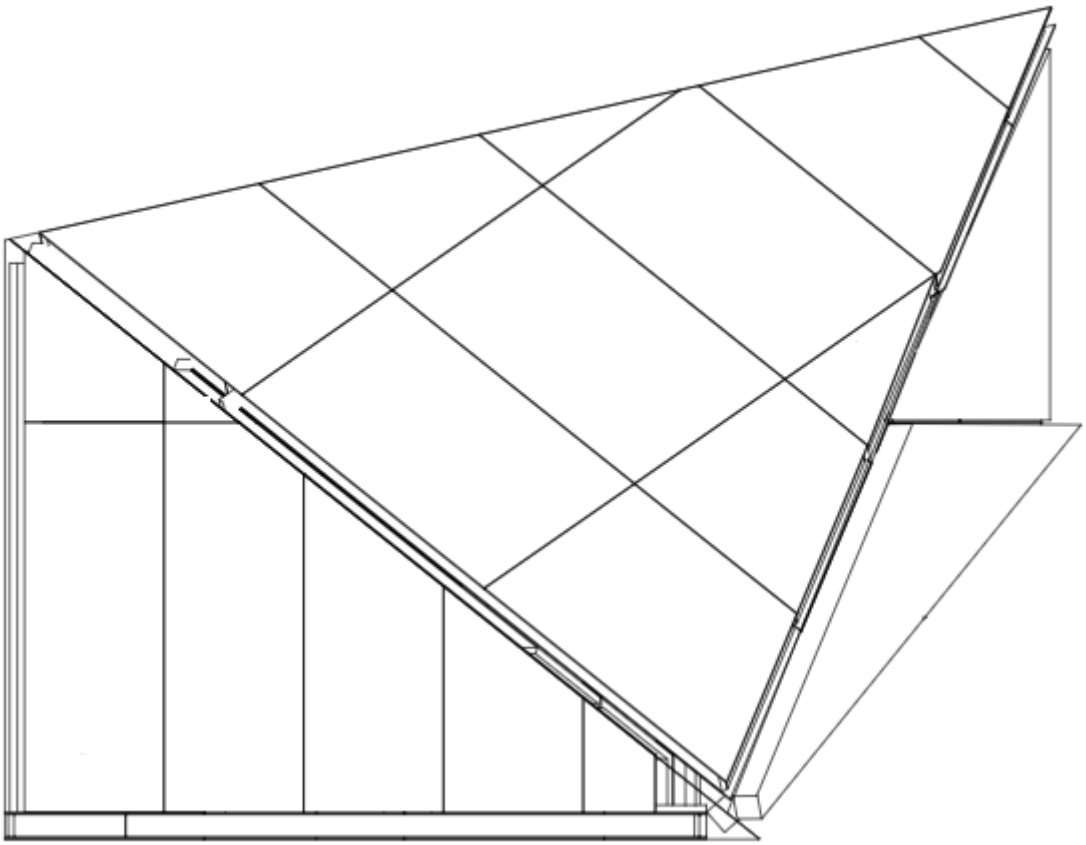

Layouts

Layouts

MTB **Modules**

premium modular building systems

Model	MTB A
The building area	20 sqm
Usable area	33 sqm
Roof angle	variable
Roof area	30 sqm
Height under the mezzanine	2,3 m
Height on mezzanine	1,6 m
Weight of the set	7000 kg

Equipment	Qty.	Dimensions
Front door	1	90
Balcony windows	2	196x233
Gable window	2	235x237

MTB Modules
premium modular building systems

MTB A

Mounting elements	Qty.
Polystyrene grater	1
Membrane	2rolls
Stapler and staples	1 set
Mounting foam	12
Gun to foam	1
Roofing silicone	2
Expansion tape	3
Roof membrane	1set
Dysperbit	1

Building kit MTB A

PanelsSIP (12mm OSB3x150mm styrofoamx12mmOSB3)
Construction timber
Set of screws
Set of flashings
Set of facade sheets

MTB **Modules**

premium modular building systems

MTB Modules Sp. z o.o.

Zamieście 9
89-600 CHOJNICE

NIP: 555-212-78-30
Bank account: Santander 30 1090 2590 0000 0001 4796 4712